





2 People
Recommended




Holds up to
250 lb (113.4 kg)

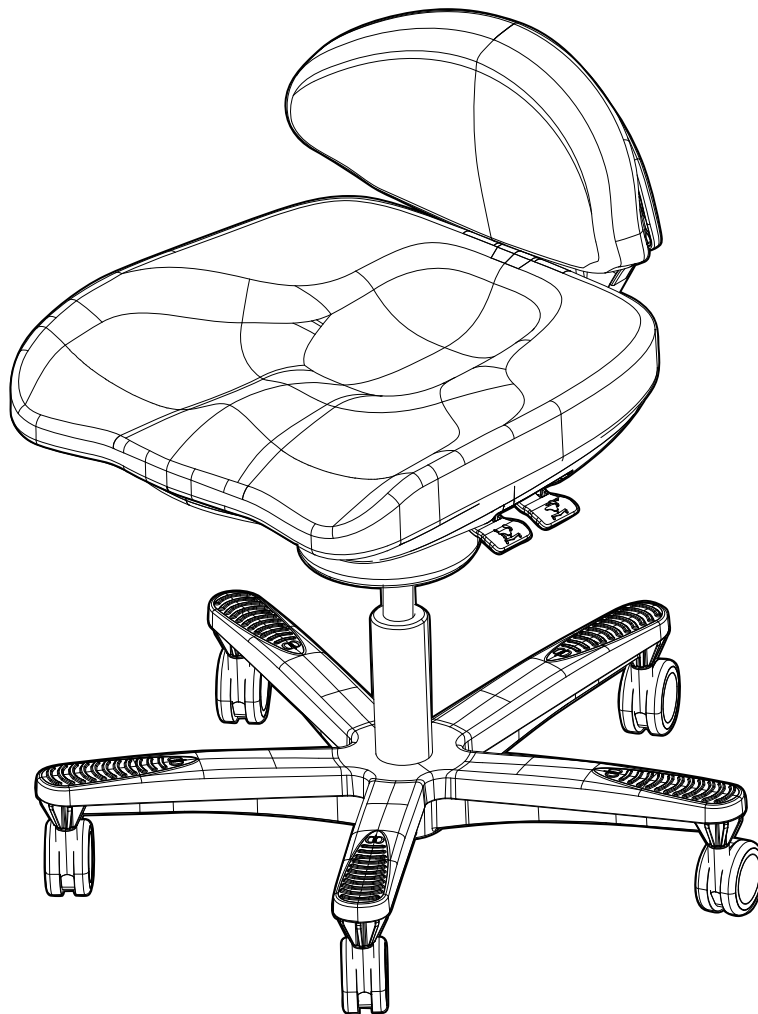


Components

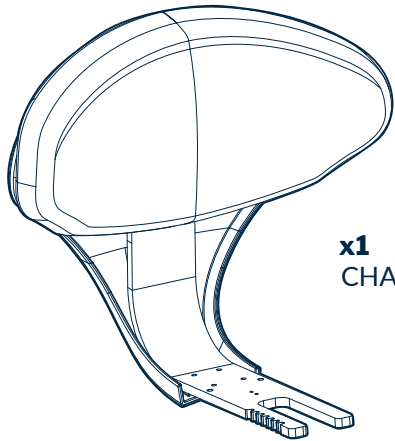


x1
CHAIR BACK

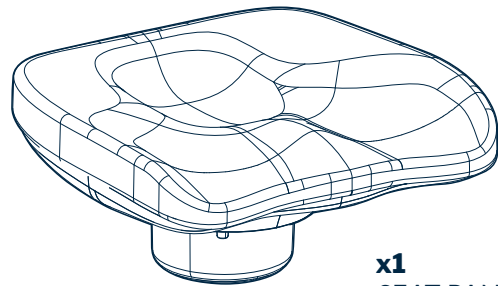


x1
SEAT PAN

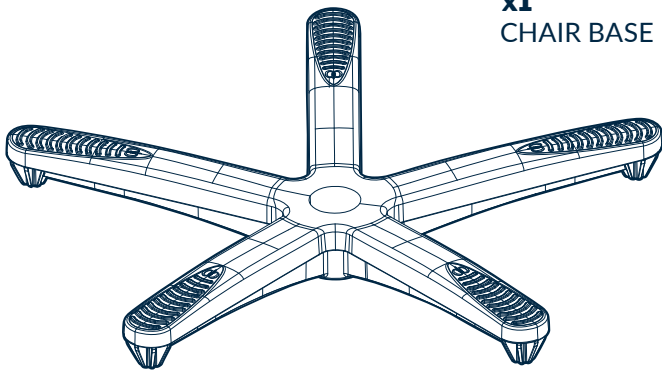


x1
CHAIR BASE




x5
CASTERS




x1
PISTON




x2
M6 X 12MM
SCREW

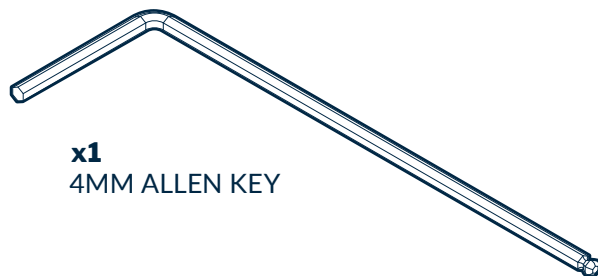

x1
4MM ALLEN KEY

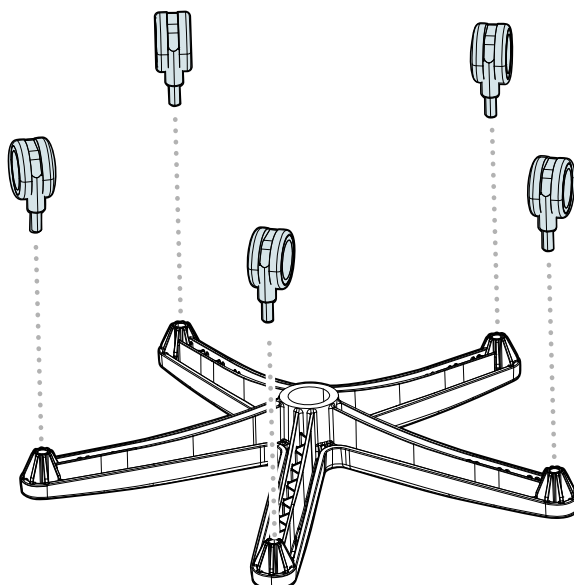
1

Insert the five **CASTERS** into the **CHAIR BASE** until they snap into place. Once attached, flip the base over.

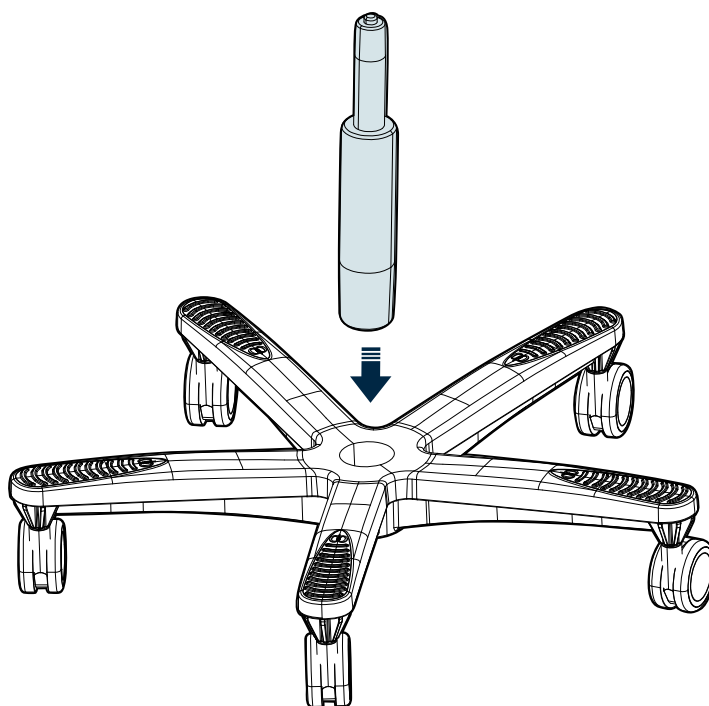2


Lower the larger end of the **PISTON** into the center of the **BASE** until it is secure.

3

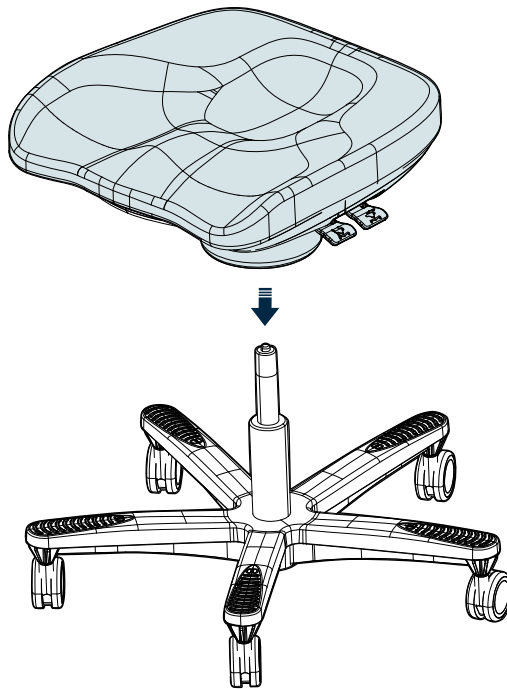

Place the **SEAT PAN** onto the **PISTON** that is attached to the **BASE**. Push down to firmly secure it in place.


4

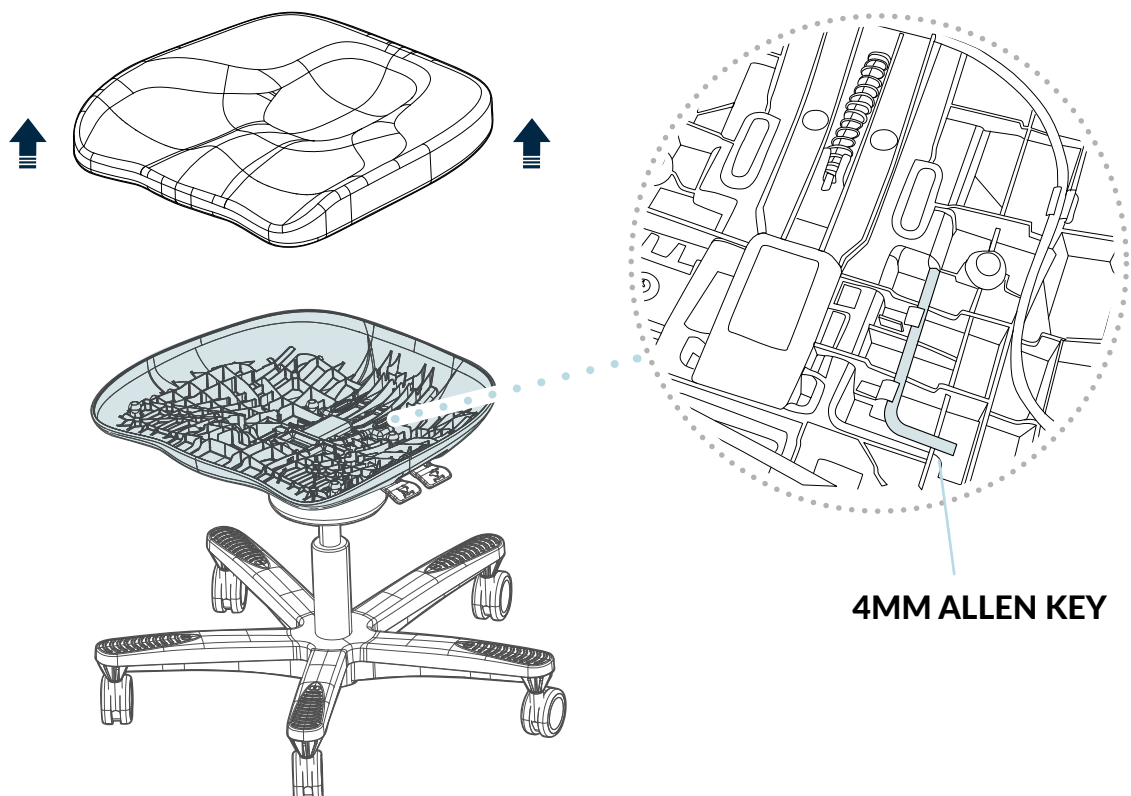

NOTE: If the cushion is difficult to remove, gently pry up the from left corner using a flat object. Use caution when prying to avoid damaging the seat or surrounding components.


Remove the **SEAT CUSHION** from the **SEAT PAN**. Locate the **4MM ALLEN KEY** that is stored in the **SEAT PAN**.

5

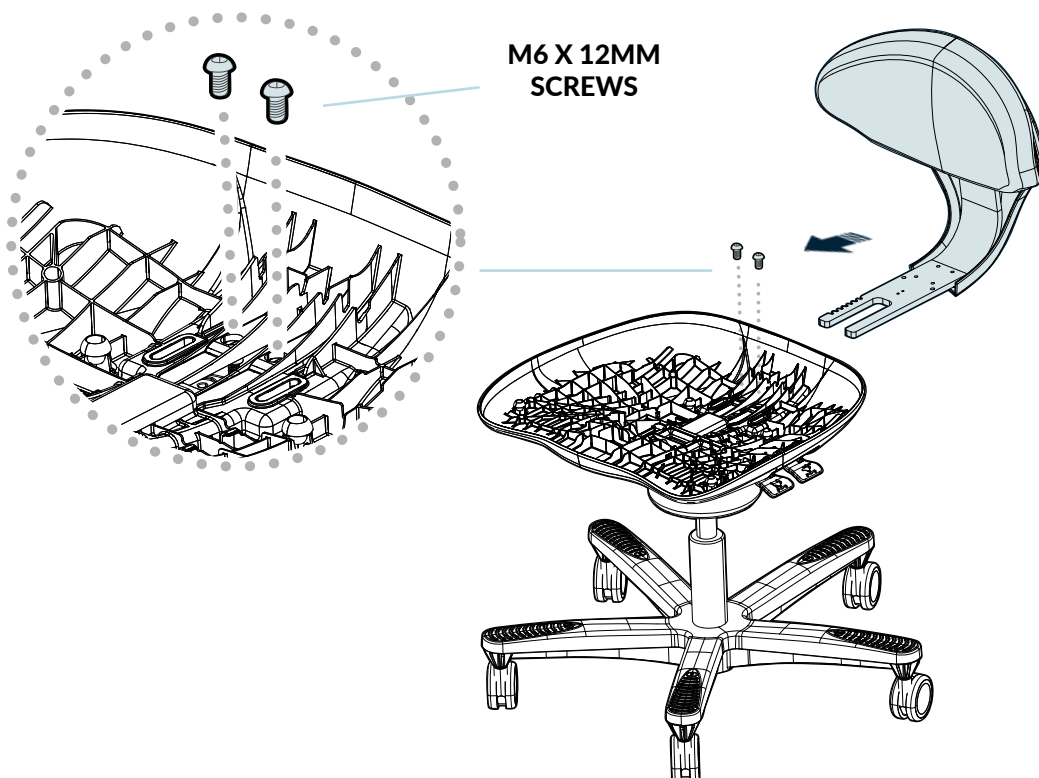



While lifting the rear lever on the left side of the **SEAT PAN**, slide the metal bar (attached to the **CHAIR BACK**) into the back of the **SEAT PAN**. Continue sliding it forward until the screw holes align. Use the back screw holes for shorter users and the front screw holes for taller users. Adjust based on your height and comfort preference. Insert **TWO (2) M6 X 12MM SCREWS** into the **SEAT PAN** and securely tighten them using the included **ALLEN KEY**.

6

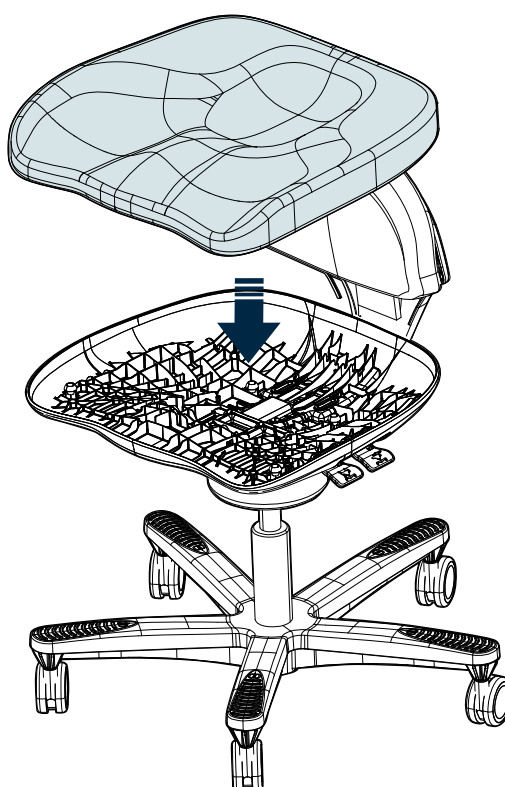



Reattach the seat cushion by aligning the four sockets underneath the cushion with the four ball connectors on the **SEAT PAN**. Then press down to secure it in place.

Adjustment Options

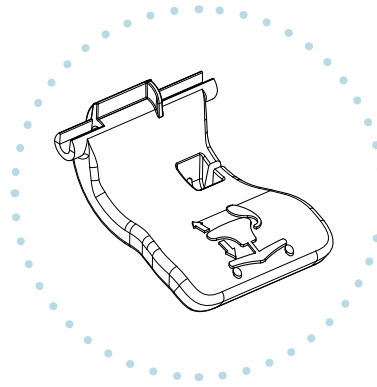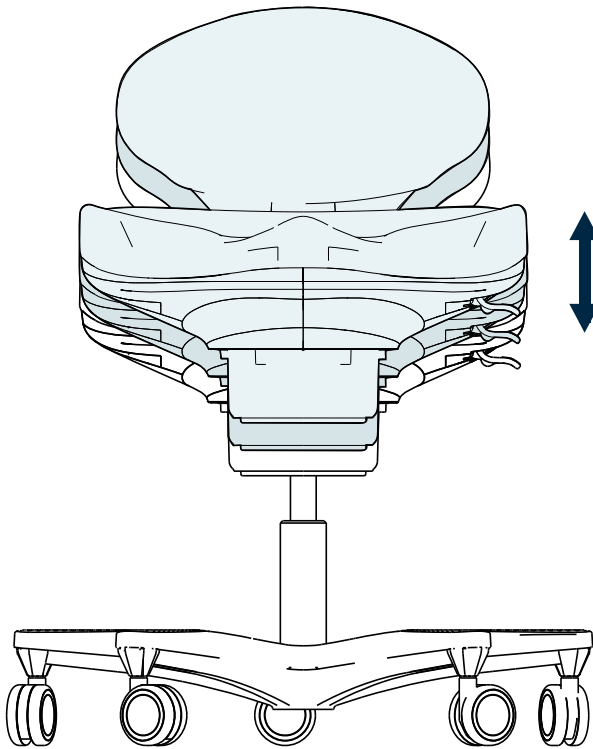

SEAT HEIGHT ADJUSTMENT

To adjust the seat height, use the front lever under the left side of the chair seat. Release the lever to lock the seat height in place.

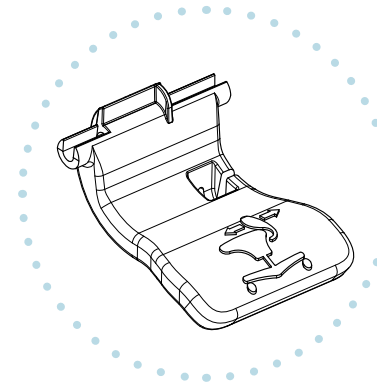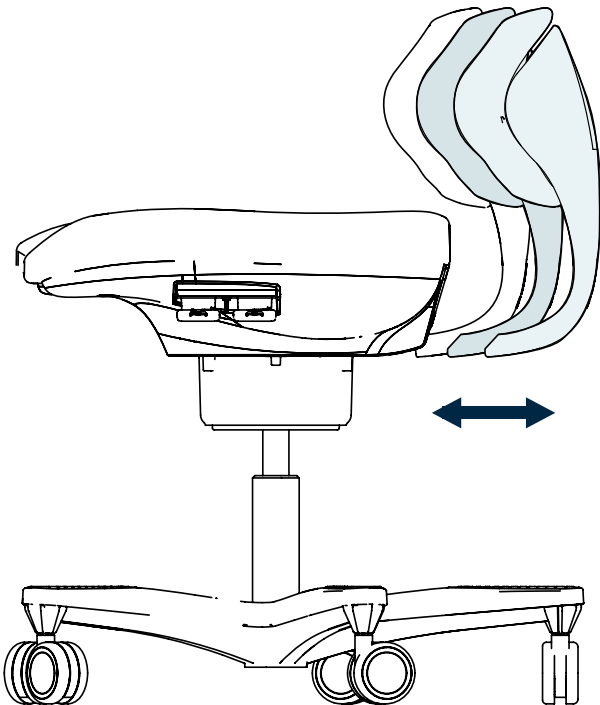

SEAT DEPTH ADJUSTMENT

To adjust the seat depth, use the back lever on the left and pull the chair back forward or push it back.



WARNING: To prevent injuries and product failure, do not use this chair for standing, climbing, or leaning. Do not use if the chair is damaged or incorrectly assembled.



(800) 207-2587

vari[®]