


# Monitor Arm + Laptop Stand



## 1A Preparing the Apple Monitor for Mounting REMOVING THE STAND FROM THE APPLE MONITOR

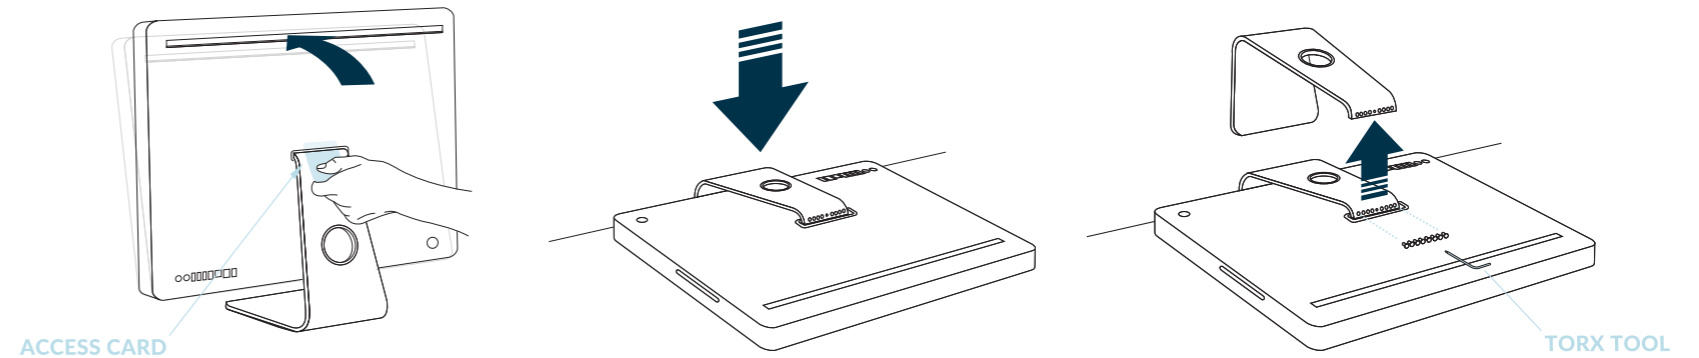

Turn your monitor so the back is facing you and gently tilt the display screen all the way forward and down. Insert the access card into the space at the top of the stand to release the latch. Push it in at a slight upward angle. If the card goes in further than an inch, try again because you may have missed the latch.

*\*Do not use a credit card or any other device to release the latch. For safety reasons and to avoid product damage, only use the access card provided.*

When the latch releases, tilt the display screen further forward until the row of 8 screws is fully visible. At this point, make sure the screen and stand are locked into place and can't be moved.


Gently place the monitor screen-side down onto a soft, dry cloth on a flat surface. Let the monitor stand hang slightly over the edge of your desk.

Now, remove the stand from your monitor by using the Torx tool to remove the 8 screws that hold it in place. Set the screws aside for the next step. *\*Keep the stand in case you choose to reattach it in the future.*

**IMPORTANT:** Do not remove the stand unless the display screen and stand are locked into place.

**IMPORTANT:** To avoid injury or product damage, ONLY use the access card provided to release the latch. If the access card is lost or damaged, contact customer service for a replacement.

## ATTACHING THE MOUNT TO THE APPLE MONITOR

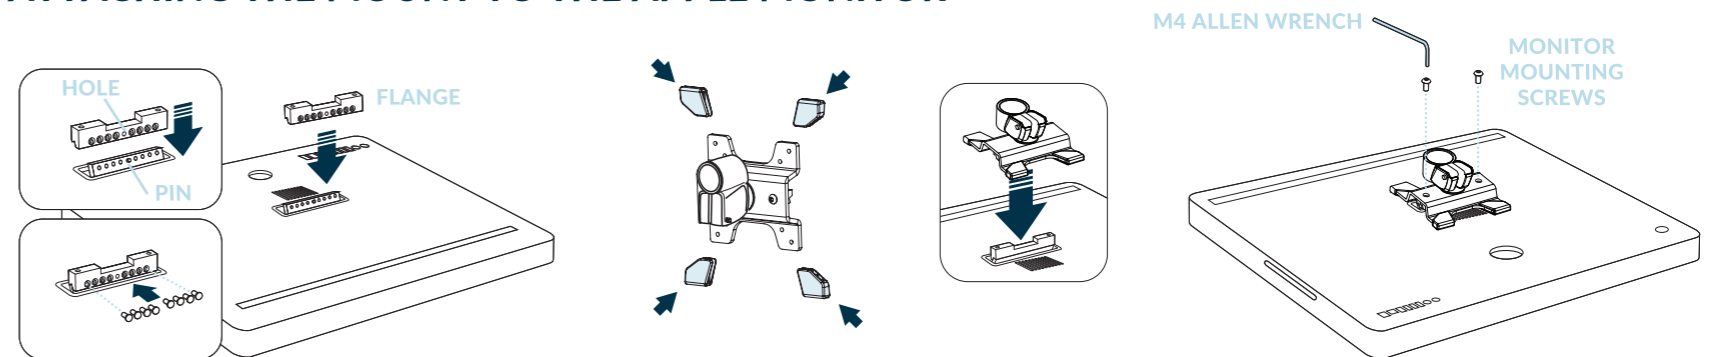


Align the middle hole in the flange with the pin on the back of your monitor where the stand was attached. Using the Torx tool and the 8 screws you removed from the stand, attach the flange to the back of your monitor. Slide the protective plastic corner pieces onto each corner of the monitor mounting bracket.

Using the M4 Allen wrench and the two monitor mounting screws, attach the monitor mounting bracket to the back of your monitor by screwing it into the flange.

**NOTE:** Do not attempt to unfold monitor brackets before attaching them to the back of the monitors. Attach them as-is.

(800) 207-2587


## 1B Preparing the VESA-Standard Monitor

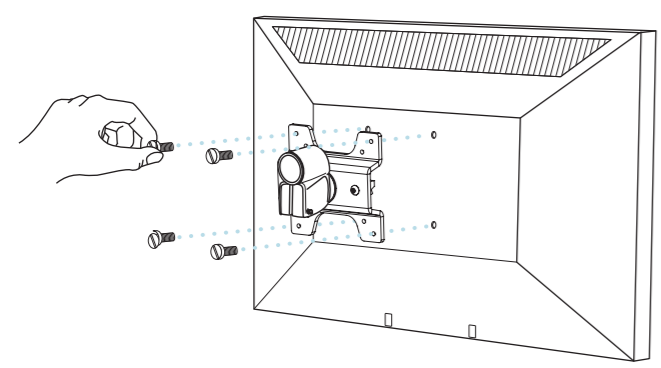

**NOTE:** Do not attempt to unfold monitor brackets before attaching them to the back of the monitors. Attach them as-is.


Affix the monitor bracket to the back of the monitor using the monitor screws provided. This can be done manually or with a flathead screwdriver.

## 2 Installing the Base

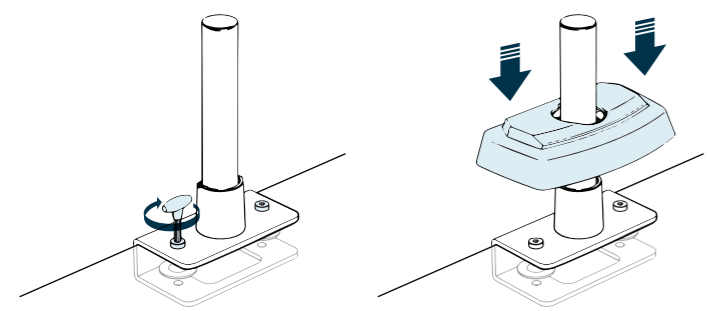


Tighten the bolts on the base using the handled Allen wrench to affix it securely to the center of the desktop and slide the base cover down over it.

## 3 Installing the Arms, Stand, & Monitor

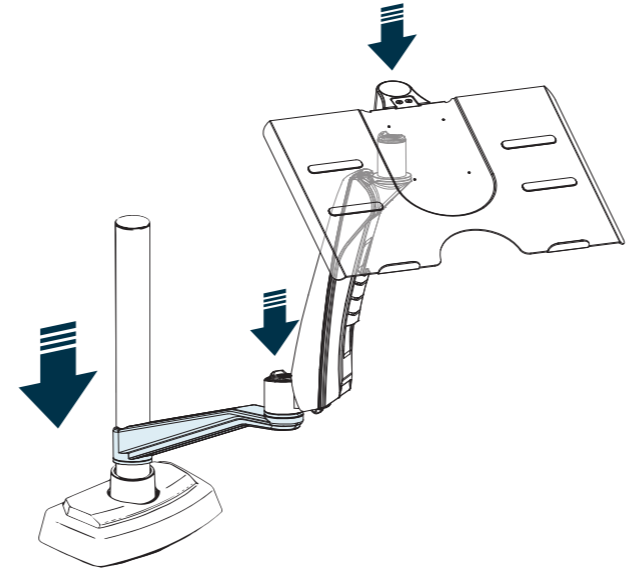


Slide one of the swivel arms down the pole all the way to the base. Attach the spring arm to the swivel arm, then click the laptop stand into place.

**CAUTION:** Please make sure the spring arm with stand is in the highest possible position when placing or removing your laptop. Without the laptop weight to hold it in place, the arm could bounce upward and cause personal injury.

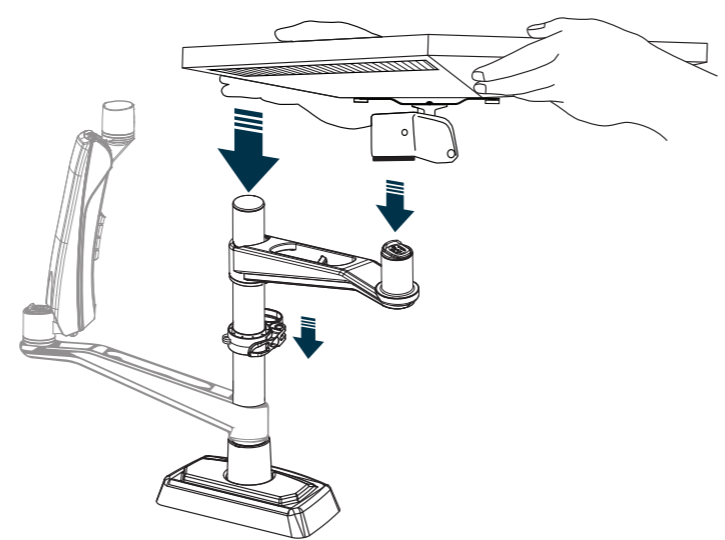


Position post collar & quick release cable manager at the desired height and tighten it securely to the post using the clamp. Slide the second swivel arm onto the pole. Grasp the sides of the monitor with the display screen facing up and slide the monitor bracket onto the top post of the swivel arm. Once it clicks into place, you can tilt the monitor down so the screen is facing forward.

## 4 Adjusting the Monitor Arms

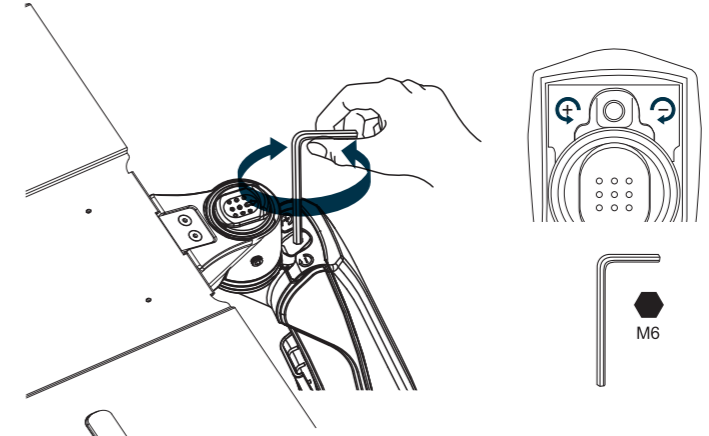

+ To tighten for heavier monitors, turn counter-clockwise.  
- To loosen for lighter monitors, turn clockwise.


**CAUTION:** Weight Capacity Requirements. The spring arm is set to hold laptops that weigh 5.5 - 9.9 lb (2.5 - 4.5kg). If your laptop is too heavy (spring arm won't stay up) or too light (spring arm won't stay down), you need to adjust the tension on the bolt inside the spring arm using the M6 wrench. To reach this bolt, the arm needs to be raised until it is as straight as possible. (See illustration below.)

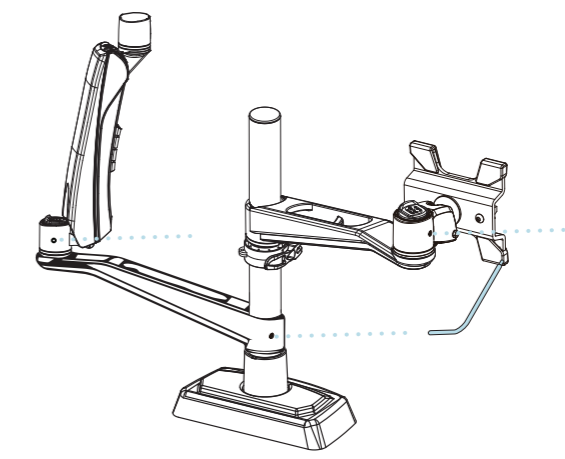







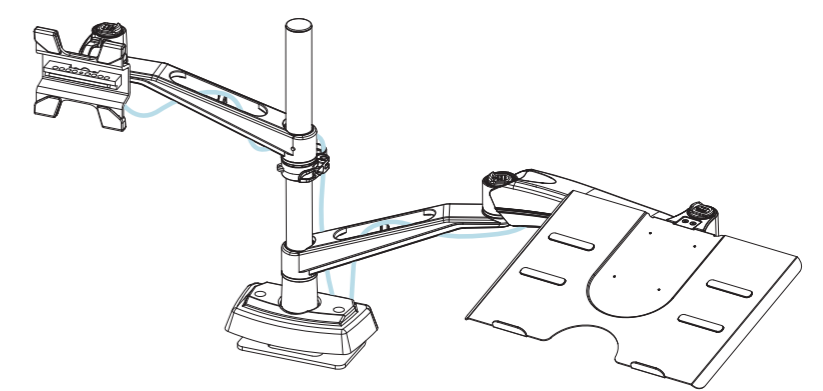

**CAUTION:** Do not overtighten.

To tighten or loosen your monitor's swing movement, use the M3 wrench and turn clockwise to increase the tension or counter-clockwise to decrease the tension.

## 5 Route Cables



### Features and Specifications

 <p><b>VESA:</b> 75x75 / 100x100</p>	 <p><b>ANGLE:</b> 100°</p>	 <p><b>PIVOT:</b> 360°</p>	 <p><b>SWIVEL:</b> 360°</p>
 <p><b>WEIGHT LOADS</b>            SWIVEL ARM: ≤ 30.8 lb / ≤ 14 kg            SPRING ARM: ≤ 19.8 lb / ≤ 9 kg            LAPTOP CRADLE: ≤ 10 lb / ≤ 4.5 kg            POLE MAX LOAD: ≤ 44.1 lb / ≤ 20 kg</p>	 <p><b>PAN:</b> 240°</p>	 <p><b>EXTENSION:</b> 23.2 in. / 590 mm</p>	 <p><b>VERTICAL:</b> 10.6 in. / 270 mm</p>