

Studio Chair & Studio Drafting Chair


vari.[®]



2 People
Recommended




Holds up to
250 lb (113.4 kg)

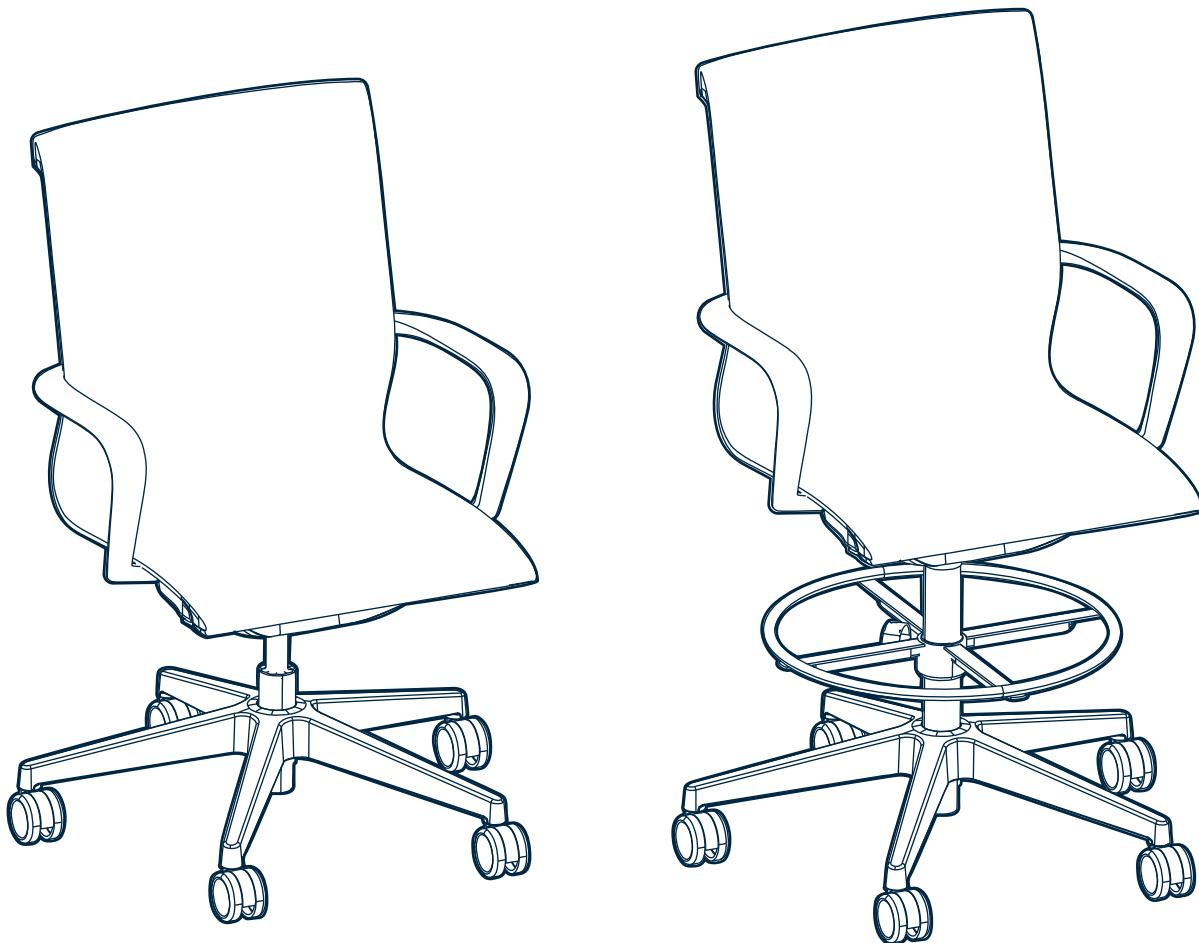


Components

NOTE: If you purchased the Studio Drafting Chair, be sure to install the longer piston. The standard piston included in the box should not be used for this model.

Studio Chair

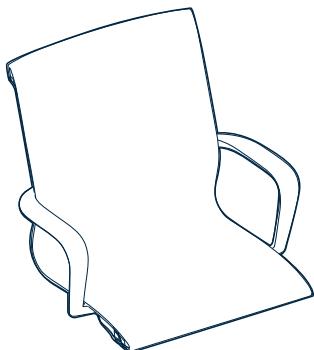

x1
CHAIR SEAT

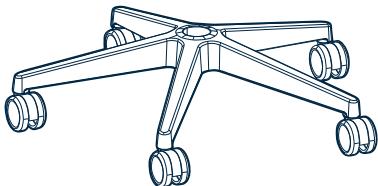


x1
CHAIR BASE WITH CASTERS




x1
PISTON

Studio Drafting Chair

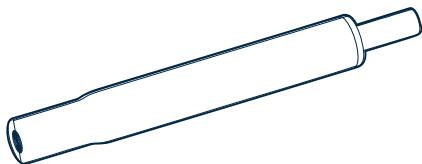

x1
LONG PISTON

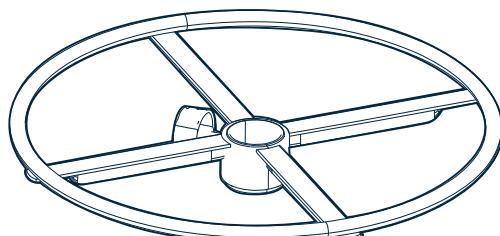


x1
FOOT RING

NOTE: Asembly instructions for the Studio Chair appear first, followed by the Studio Drafting Chair. Confirm you're following the correct steps for your chair before you begin.

Studio Chair


1

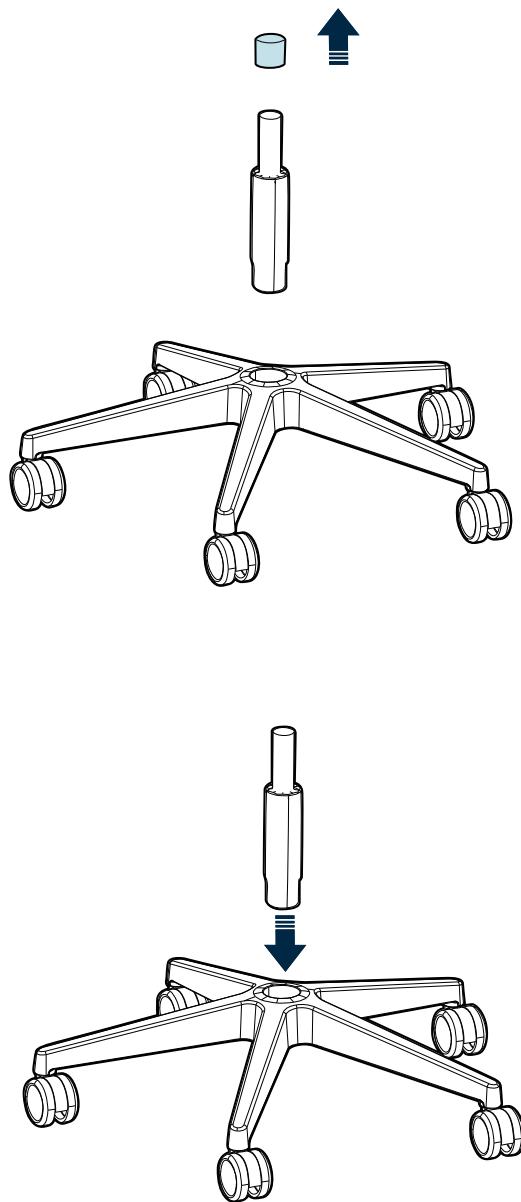

NOTE: Remove the PROTECTIVE CAP from the small end of the PISTON. Once the chair is assembled, the cap is no longer needed and can be discarded.

After removing the **CAP**, insert the large end of the **PISTON** into the center of the base until it is secure.

2

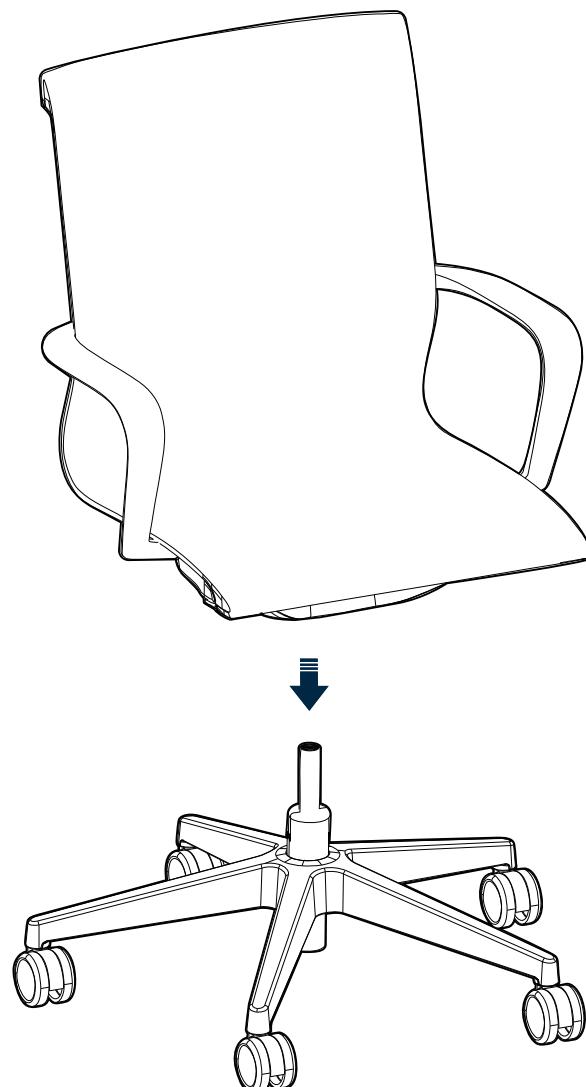


With assistance, carefully lower the **CHAIR SEAT** onto the **PISTON**. Press down evenly on the seat cushion a few times to ensure it's fully secured.

CAUTION: Once assembled, do not attempt to disassemble the chair, as doing so could damage the product.

Studio Drafting Chair

1

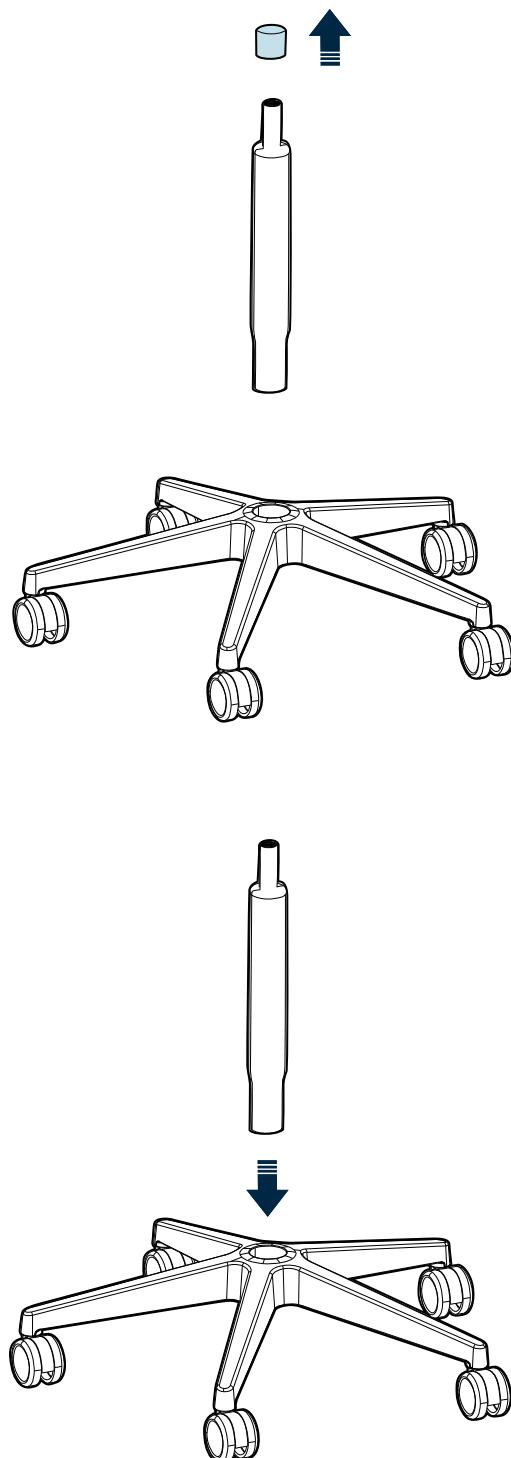


IMPORTANT: Ensure the longer piston is used when assembling the Drafting Chair.

NOTE: Remove the **PROTECTIVE CAP** from the small end of the **PISTON**. Once the chair is assembled, the cap is no longer needed and can be discarded.


After removing the **CAP**, insert the large end of the **PISTON** into the center of the base until it is secure.

2

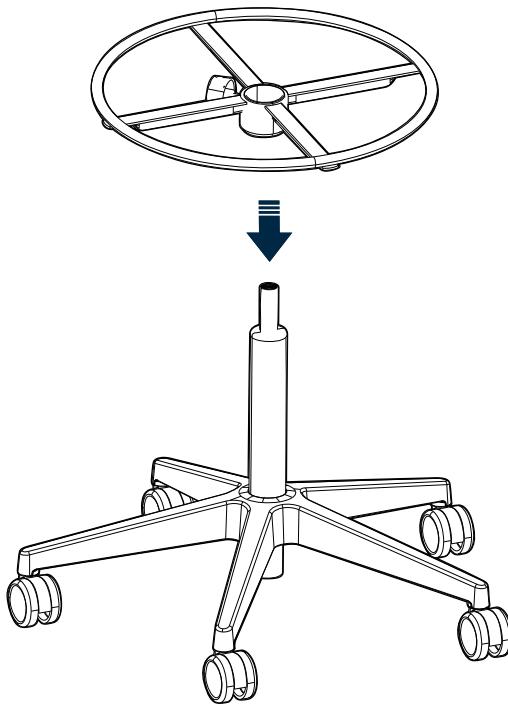

Slide the **FOOT RING** onto the **PISTON**, adjust to the desired height, then tighten the knob to the right to secure it in place.


3

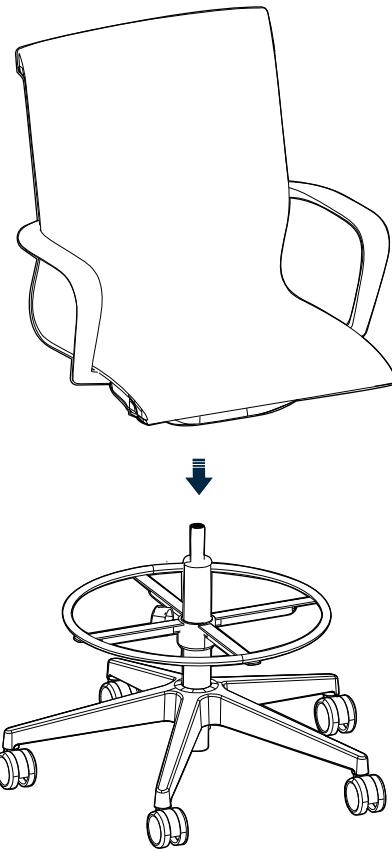

With assistance, carefully lower the **CHAIR SEAT** onto the **PISTON**. Press down evenly on the seat cushion a few times to ensure it's fully secured.


CAUTION: Once assembled, do not attempt to disassemble the chair, as doing so could damage the product.

Adjustment Options

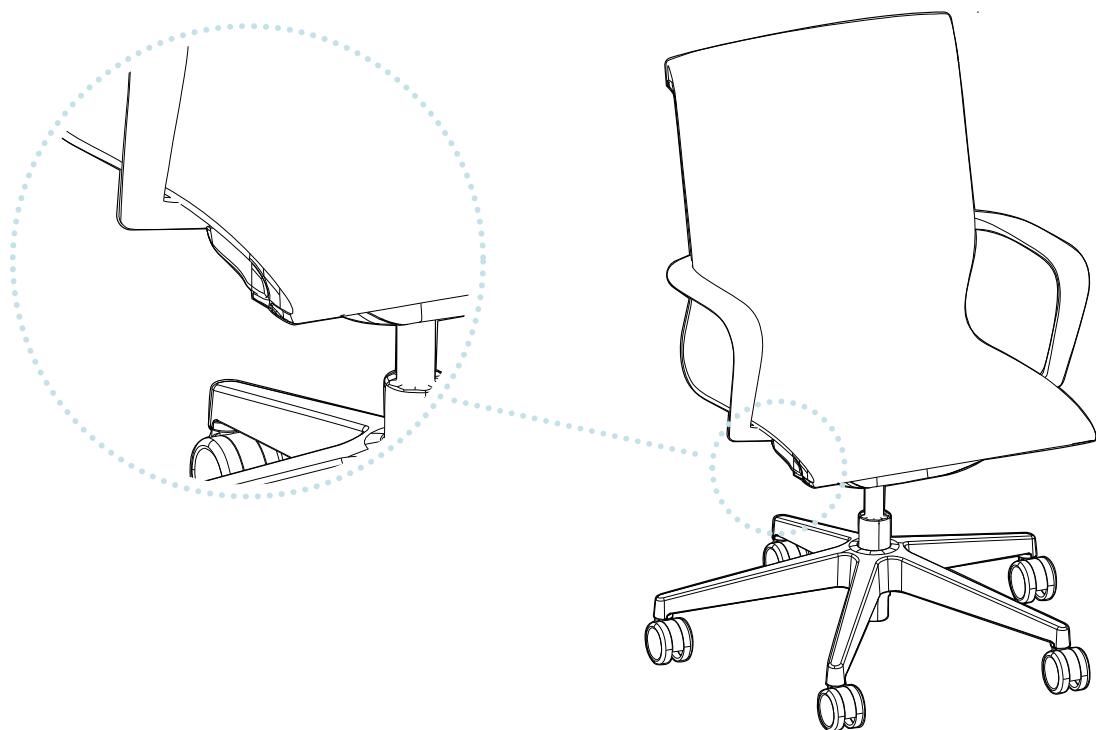

SEAT HEIGHT

To adjust the seat height, use the lever under the right side of the chair seat. Release the lever to lock the seat height in place.

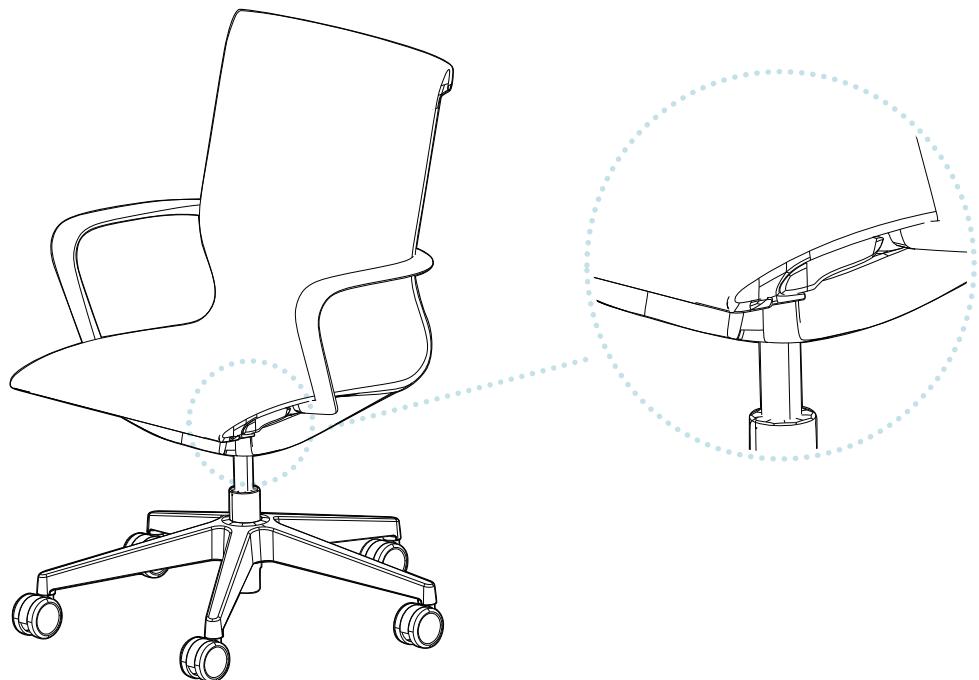


CENTER TILT

To tilt the chair, pull and release the left-side lever. To lock the chair upright, pull and release the lever again.

How to Detach Piston From Seat Base

Tools Needed (Not Included)

- RUBBER MALLET (OR SIMILAR TOOL)

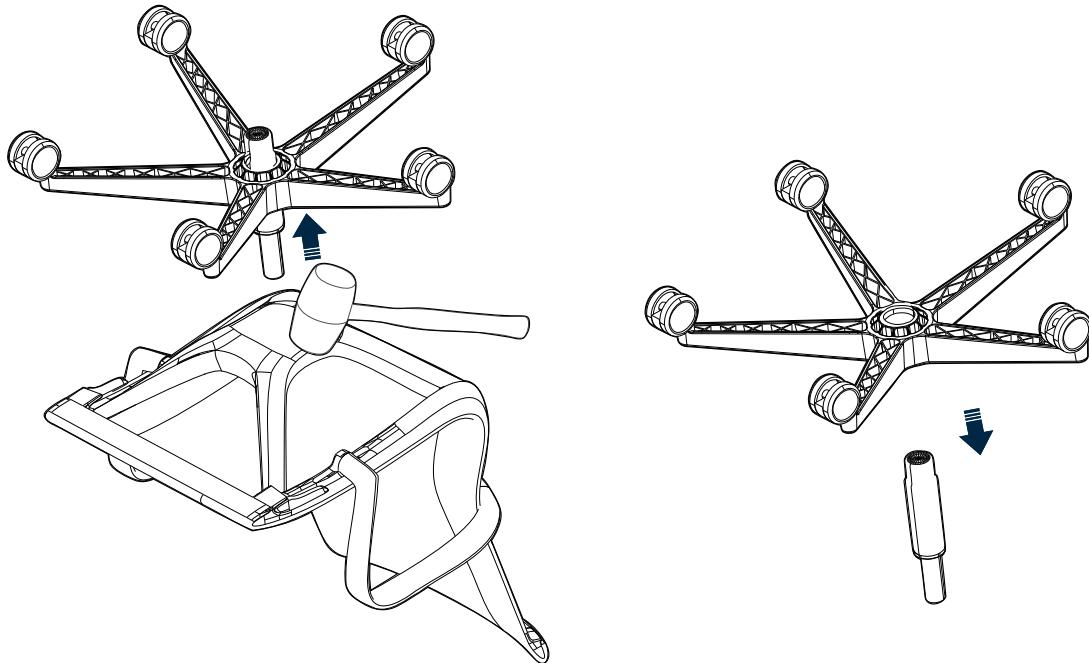

NOTE: Only proceed with the following steps if the incorrect piston has been installed.

Turn the chair upside down. Using a rubber mallet (or similar tool), firmly tap the metal center of the seat base to loosen the piston. Then pull the piston and base out of the chair.

If the piston remains stuck in the chair base, gently tap the back of the piston to help release it from the base.



WARNING: To prevent injuries and product failure, do not use this chair for standing, climbing, or leaning. Do not use if the chair is damaged or incorrectly assembled.



(800) 207-2587

vari[®]