# Aspire Collection

A designer, fixed-position sofa and chair with generous proportions and consistent support.

**Additional Details**

- Modern Design Suitable for Collaborative Settings
- Flexible Décor Pairing
- Sofa and Side Chair Feature High-Resilience Foam Core
- Tables Feature Easy-to-Clean Laminate Tops and Metal Legs
- Ships with Minimal Assembly Required via Freight Delivery
- 10-Year Limited Warranty
- Sofa Supports up to 700 lb (317.5 kg) Across All Seats
- Chair Supports up to 300 lb (136 kg)
- Coffee and Side Tables Each Support up to 200 lb (90.5 kg)

For patent and trademark information, visit Vari.com/patents ©2026 Varidesk, LLC. All Rights Reserved.

## ASPIRE THREE-SEAT SOFA

Available in Crow, **Graphite Faux Leather Vinyl**, Navy, Soot, or Heron

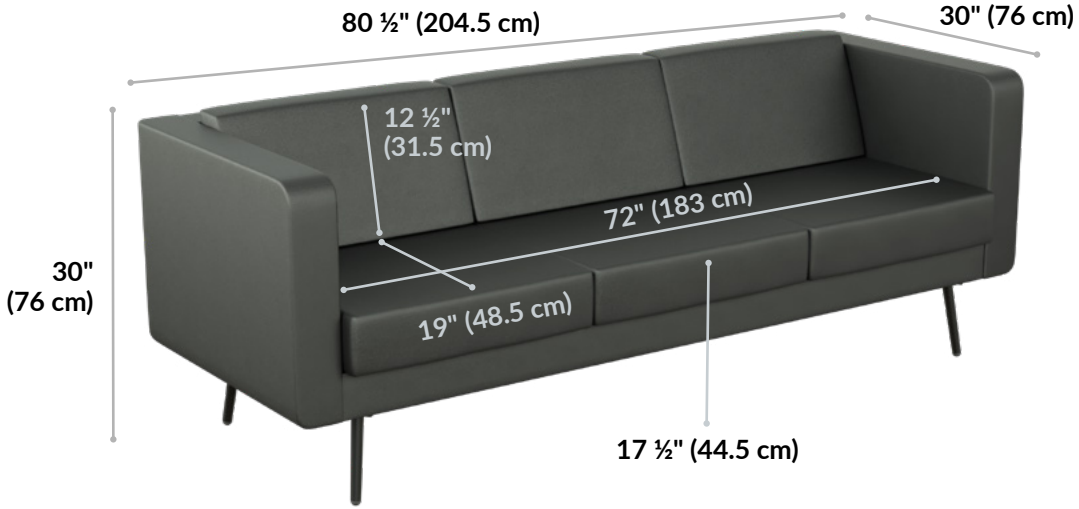


## ASPIRE SIDE CHAIR

Available in **Navy**, Heron, Graphite Faux Leather Vinyl, or Soot

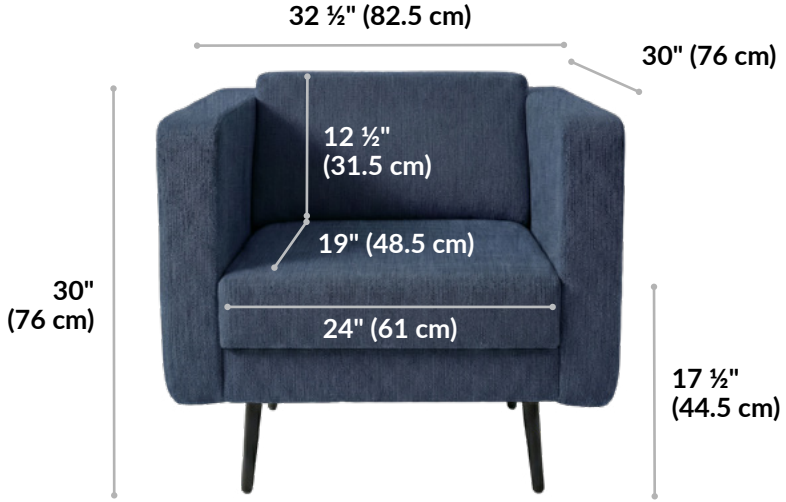


## ASPIRE COFFEE TABLE

Available in Walnut

## ASPIRE SIDE TABLE

Available in Walnut

# Fabric Details and Swatches

## CROW [1]

*Aspire Three-Seat Sofa*

## HERON [1]

*Aspire Three-Seat Sofa*
*Aspire Side Chair*



## NAVY [1]

*Aspire Three-Seat Sofa*
*Aspire Side Chair*



## SOOT [2]

*Aspire Three-Seat Sofa*
*Aspire Side Chair*

### FABRIC COMPOSITION

[1] 100% Polyester with Synthetic Latex Backing

[2] 98% Polyester, 2% Nylon with Synthetic Latex Backing

### FABRIC COMPLIANCE & DURABILITY

- Abrasion Resistance Suitable for Heavy-Use Environments — 95,000–100,000 Double Rubs
- Class 4 Lightfastness (40–100 hours) — Resistant to Fading under Light Exposure
- Class 3 (Wet) or Class 4 (Dry) Colorfastness — Strong Resistance to Color Transfer under Normal Use Conditions
- All Fabrics Meet the Standards Flammability Compliance (CA 117-2013, UFAC Class 1, and NFPA 260 Class 1) and Are Suitable for Use in Office and Commecial Environments

### FABRIC STAIN RESISTANCE

Treated with iClean Nano Technology for a High-Performance Stain-Repellent Finish

### FABRIC CARE & MAINTENANCE

1. Vacuum upholstery before cleaning.
2. Blot spills immediately using a soft cloth.
3. Use a damp cloth or sponge (water only).
4. Work from the outer edge toward the center of the stain.
5. Blot dry using clean paper towels.

Avoid harsh chemicals or aggressive scrubbing.

# Wood Swatch

## WALNUT

*Aspire Coffee Table*
*Aspire Side Table*

### COMPOSITION

Laminate

### CARE & MAINTENANCE

- To clean the surface, use a damp cloth or sponge and a mild soap or detergent. Rinse thoroughly with warm water and wipe dry.

# Faux Leather Vinyl Details and Swatch

## GRAPHITE

*Aspire Three-Seat Sofa*
*Aspire Side Chair*

### FABRIC COMPOSITION

100% Polyurethane
Backing: 70% Polyester 30% Cotton

### FABRIC COMPLIANCE AND DURABILITY

- Abrasion Resistance Suitable for Heavy-Use Environments — 200,000 Double Rubs
- Class 4 Lightfastness (40–200 hours) — Resistant to Fading under Light Exposure
- Class 4 (Wet & Dry) Colorfastness — Strong Resistance to Color Transfer under Normal Use Conditions
- All Fabrics Meet the Standards Flammability Compliance (CA 117-2013, UFAC Class 1, and NFPA 260 Class 1) and Are Suitable for Use in Office and Commecial Environments

### FABRIC FINISH

Treated with Antimicrobial-Silver Ion Technology

### FABRIC CARE & MAINTENANCE

A clean cloth, dampened with the appropriate cleaning solution, should be applied to the affected areas as soon as possible. Blot the fabric with the treated cloth, working from the outer edge of the stained area and moving in toward the center. In order to effectively draw out the stain, renew the cleaning cloth as often as necessary to maintain an absorbent surface.

Clean all stained areas as soon as possible in accordance with the recommended stain removal procedures. Spot clean with upholstery shampoo, foam from a mild detergent, or mild dry cleaning solvent. Hot water extraction or steam cleaning is not a recommended cleaning method. Clean spots or stains from the outside to the middle of the affected area to prevent circling (see Stain Removal Matrix below).

1. Soap and water
2. Difficult stains use Fantastik® or Formula 409®
3. Disinfects with 5:1 water/bleach solution